Aluminum Replacement Windows

Light Commercial • Thermally Broken • Custom Built

- · Custom Built, Easy to Install & Clean
- · Strong, Durable & Engineered to Save Money
- Lifetime Limited Residential Warranty

(ask about our commercial application warranty details)







#264



#266






1/3-1/3-1/3 Three-Lite Slider Three-Lite Slider #268


One-Lite Picture Window #269

#269

Double Hung Model #261

(shown with optional sill and jamb panning)

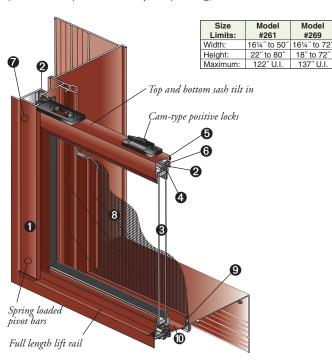

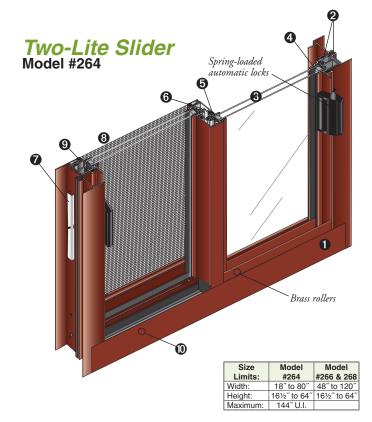

Standard Features & Benefits

- Baked on polyester finish backed by a Lifetime Limited warranty.
- Thermally broken sash and main frame reduces conduction of heat and cold.
- **3**/4" Comfor Tech™ warm edge glazing system reduces heating and cooling bills.
- Wrap around marine glazing seals glass firmly and makes replacement easy.
- Barrier-fin-type weatherstripping reduces air and dust infiltration.
- Interlocking meeting rails
- Adjustable steel jamb shims
- Fiberglass half screen
- Extruded aluminum screen frame adds strength.
- The sill's extra height and slope protects against water infiltration.



Options and Specifications:



Optional DuraGuard Screens:

- Extruded continuous top hinge system
- 2 Dual spring loaded stainless steel latches
- 3 12 x 12 mesh x .023" diameter black stainless
- 4 Heavy-duty extruded aluminum frame
- 6 Contoured design with "Draw Tight" screen system
- 6 No exposed exterior fasteners

Optional Factory Mounted DuraGuard Screen with .023 Gauge Stainless Steel Screen Available on #261 & #264 Models

Options:


- Obscure Glass
- · Double Strength Glass
- ComforTech[™] DLA*
- · Tempered Glass
- Tinted Glass
- · Oriel Style

- Colonial, Prairie, Cottage & Diamond Style Painted Grids
- Colonial, Prairie & Cottage Style Pencil Brass Grids
- Full Screens
- Aluminum Screen Wire
- Panning and Snap-on Trim
- * High Performance Low-E glass with Argon

Grid Colors	White	Café Cream	Tudor Brown	Rustic Bronze	Sandpiper Beige	Sand- stone	Mountain Berry	Forest Green
Colonial, Prairie & Cottage Style Flat Grids	•	•	•	•	•	•		
Colonial, Prairie & Cottage Style Contour Grids	•	•	•	•	•	•	•	•
Diamond Style Flat Grids	•	•	•	•	•			

To select finish, refer to our color selector for accurate color representation.

Ask About Color Coordinated Storm Doors & Entry Doors







Test Results:

Structural Test

Air Leakage Rate:

Maximum Water Pressure Achieved:

Structural Pressure:

Overall Product Rating:

Thermal Test

ComforTech™ DLA with Low-E Storm Unit: ComforTech™ DLA without Storm Unit:

261 **Double Hung**

0.04 SCFM/ft² 6.0 PSF 52.5 PSF

DH - C35

U - Factor: 0.30 0.42

264 **Two-Lite Slider**

0.03 SCFM/ft² 5.25 PSF 52.5 PSF

HS - C35

U - Factor: 0.28 0.42


269 **Picture Window**

0.01 SCFM/ft² 9.75 PSF 97.5 PSF F-C65

U - Factor: 0.23 0.36

SCFM = Standard Cubic Foot per Minute PSF = Pounds per Square Foot DH = Double Hung HS = Horizontal Slider C = Commercial F = Fixed ft2 = Square Foot







Distributed by: